

TOPCon

DHN-78X16/DG(BW)

0~+5W

600~630W



Higher Power Generation Efficiency

N-type TOPCon module could increase power generation by 3%+ per watt compared with PERC module



Higher Power Output

Bifacial module back-side power increases 5-25%



Lower Degradation Rate, PID Resistance

First-year $\leq 1\%$, 2-30 year $\leq 0.4\%$; excellent Anti-PID performance



Lower Temp. Coefficient

More power generation under high-temperature



Better Dim Light Performance

Excellent performance under dim light

Comprehensive Products & System Certificates

IEC 61215 / IEC 61730 / CE / INMETRO

ISO 45001: 2018/International standards for occupational health & safety

ISO 14001: 2015/Standards for environmental management system


ISO 9001: 2015/Quality management system



Quality Guarantee

12-Year Material & Technology Warranty


30-Year Linear Power Output Warranty

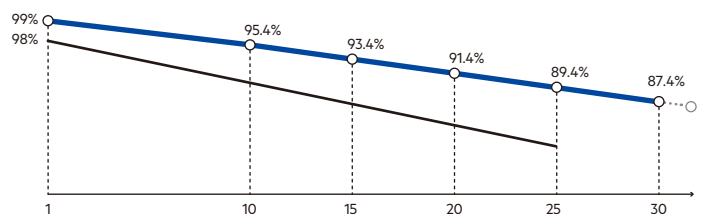

▲ DAH Solar Linear power output guarantee ▲ Standard Linear power output guarantee

Mechanical Specification

Cable	4.0mm ² , 350/250mm in length, (Including Connector) length can be customized
No.of Cells	156 (6×26)
Glass	2.0mm High Transmission, Antireflection Coating
Junction Box	IP68, 3 Bypass Diodes
Connector	MC4 Compatible
Weight	35kg
Cells Type	N-type 182×91mm
Dimension (L×W×T)	2465×1134×30mm
Packing	36pcs/Pallet, 576pcs/40HQ

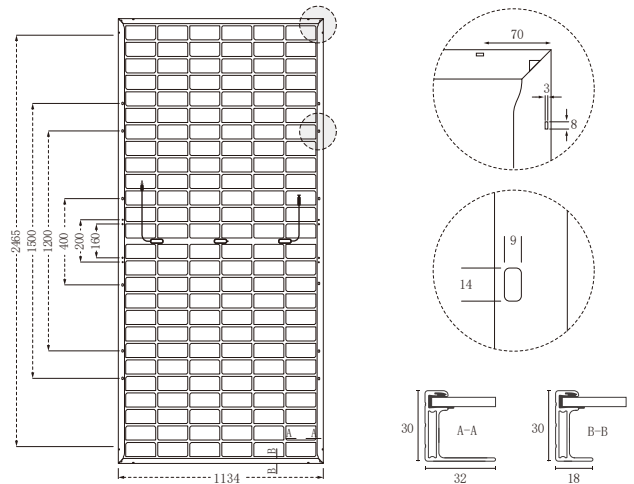

Electrical Characteristics

Module Type	DHN-78X16/DG													
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT		
Maximum Power (Pmax)	600	451	605	455	610	459	615	462	620	466	625	470	630	474
Open-circuit Voltage (Voc)	54.8	52.1	55.0	52.3	55.2	52.4	55.4	52.6	55.6	52.8	55.8	53.0	56.0	53.2
Maximum Power Voltage (Vmp)	46.0	43.7	46.2	43.9	46.4	44.1	46.6	44.3	46.8	44.5	47.0	44.7	47.2	44.8
Short-Circuit Current (Isc)	13.84	11.17	13.90	11.22	13.96	11.27	14.02	11.32	14.08	11.37	14.14	11.42	14.20	11.46
Maximum Power Current (Imp)	13.04	10.32	13.10	10.37	13.15	10.41	13.20	10.45	13.25	10.49	13.30	10.53	13.35	10.57
Module Efficiency (STC)	21.46		21.64		21.82		22.00		22.18		22.36		22.54	
Refer Bifacial Factor	80±5%													

STC: Standard Test Environment : Irradiance 1000W/m², Cell temperature 25°C, Spectrum AM1.5
 NOCT: Standard Test Environment : Irradiance 800W/m², Ambient temperature 20°C, Spectrum AM1.5, Wind speed 1m/s

Double-Sided Power Generation Parameters (Rear gain)

5%	Maximum Power (Pmax)	630	635.25	640.5	645.75	651	656.25	661.5
	Module Efficiency (%)	22.54	22.73	22.91	23.10	23.29	23.48	23.66
15%	Maximum Power (Pmax)	690	696	702	707	713	719	725
	Module Efficiency (%)	24.68	24.89	25.10	25.30	25.51	25.71	25.92
25%	Maximum Power (Pmax)	750	756	763	769	775	781	788
	Module Efficiency (%)	26.83	27.05	27.28	27.50	27.73	27.95	28.17

Operating Parameters

Maximum System Voltage	1500V DC
Power Tolerance	0~+5W
Operating Temperature	-40 ~ +85°C
Maximum Series Fuse Rating	30A
Nominal Operating Cell Temperature	45°C±2°C
Application Level	Class A

Temperature Coefficient

Temperature Coefficient of Isc (α Isc)	0.046%/°C
Temperature Coefficient of Voc (β Voc)	-0.25%/°C
Temperature Coefficient of Pmax (γ Pmp)	-0.30%/°C

Mechanical Loads

Snow load, frontside / Wind load, backside	5400Pa/2400Pa
--	---------------

I-V Curve

